



LED | CE | 220/240 V_~ | -25°C / +45°C | IP66 | IK08 | RG0 | CRI >80 | 3 step MacAdam | <10% LOW flicker | L90-B10 >60.000h | L80-B50 >100.000h | 7 YEARS WARRANTY

Code	W tot.	°K - CRI	n° Led	Lm LED	Lm OUTPUT	Lm/W	L (mm)
2100LD4009EL	9	4000K - CRI>80	1x32	1459	1189	132	595
2100LD4012EL	12	4000K - CRI>80	1x32	1791	1459	122	595
2100LD4018EL	18	4000K - CRI>80	1x128	3347	2727	152	1155
2100LD4019EL	19	4000K - CRI>80	1x64	2918	2378	125	595
2100LD4020EL	20	4000K - CRI>80	1x64	2958	2410	121	1155
2100LD4023EL	23	4000K - CRI>80	1x128	4143	3376	147	1155
2100LD4024EL	24	4000K - CRI>80	1x80	3647	2972	124	1435
2100LD4029EL	29	4000K - CRI>80	1x80	5178	4220	146	1435
• 2100LD4036EL	36	4000K - CRI>80	1x128	5835	4755	132	1155
2100LD4042EL	42	4000K - CRI>80	1x160	7294	5944	142	1435
2100LD4049EL	49	4000K - CRI>80	1x120	7864	6409	131	1155
2100LD4050EL	50	4000K - CRI>80	1x128	8589	7000	140	1155
• 2100LD4054EL	54	4000K - CRI>80	1x150	8904	7256	134	1435
2100LD4060EL	60	4000K - CRI>80	1x160	9855	8031	134	1435
• 2100LD4072EL	72	4000K - CRI>80	1x160	12088	9851	137	1435



DOTAZIONE / EQUIPMENT





- Cablaggio rapido interno con pressacavo PG13,5.
- Internal quick wiring with PG13.5 cable gland.
- Sistema di fissaggio a plafone o sospensione a clip incluso.
- Surface or suspension clip mounting system included.

OPZIONI / OPTION

- EL**
- EL standard on/off
 - LD dali / dali push
 - D1 dali + em. 1h
 - E1 em. 1h
 - E3 em. 1h
 - FC fila continua / continuous row

DIMENSIONI / DIMENSIONS

	A (mm)	L (mm)	C (mm)	Kg
D1	62	595	62	1,2
D2	62	1155	62	2,1
D3	62	1435	62	3,3

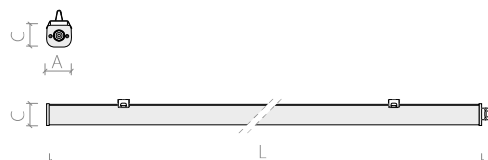

ACCESSORI / ACCESSORIES



Example: 2100LD4009EL